


Schiatti BFT12 Series

Model	Thickness Range	Min. & Max. Dimensions	Max Load	Working Height	Power	Tank Capacity	Air Consumption	Speed	Weight
2D+2L	3-12mm	Min 1600 Max 1300/1600/2000 2500/3000	370kg	900mm	20.5kW	320l	28.5NI/min	1.4-7.4 m/min	3550kg
2D+2L+SP	3-12mm	Min 1600 Max 1300/1600/2000 2500/3000	370kg	900mm	21.5kW	320l	40.0NI/min	1.4-7.4 m/min	3600kg
2D+2F+2L	3-12mm	Min 1600 Max 1300/1600/2000 2500/3000	370kg	900mm	25.0kW	400l	38.0NI/min	1.4-7.4 m/min	4200kg

2D+2F+2L+SP	3-12mm	Min 1600 Max 1300/1600/2000 2500/3000	370kg	900mm	25.7kW	400l	50.0NI/min	1.4-7.4 m/min	4250kg
--------------------	---------------	--	--------------	--------------	---------------	-------------	-------------------	--------------------------------	---------------

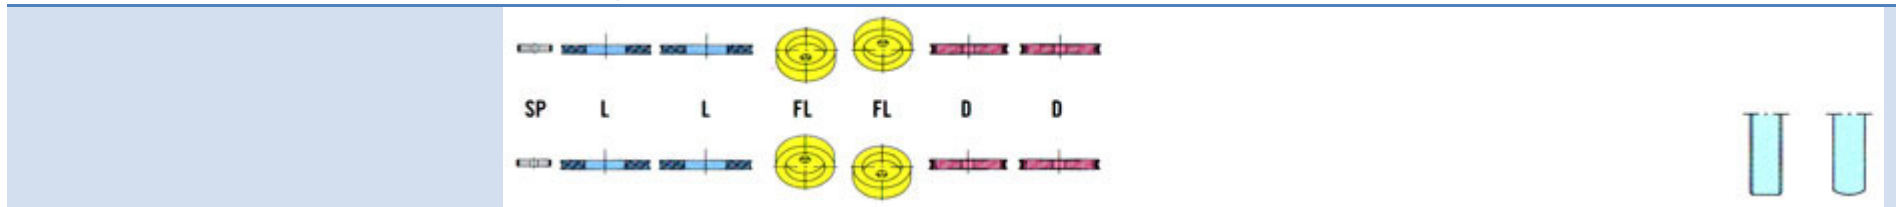

Grinding Configuration Key

- D** = Flat diamond wheel
- L** = Flat polishing wheel
- FD** = Arris diamond wheel
- FL** = Arris polishing wheel
- CO** = Felt polishing wheel
- DT** = Edge diamond wheel
- DB** = Bakelite wheel
- LT** = Edge polishing wheel
- SP** = Dubbing device